



## 8-24 hybrid zone, Grade 2 intruder alarm panel: **Scantronic 9751**



**COOPER** Safety

### Flexible installation

8 wired zones out of the box, expandable up to 24 zones hardwired and radio to enable you to fit peripherals wirelessly where required, without disruption to décor

### World class radio performance

Scantronic 868MHz narrow band radio, dual diversity receiver gives excellent range for easy installation

### Wide range of applications

When expanded with RFX8 or RFX16, utilises 700r radio peripherals to meet most security requirements including intruder, personal attack and fire

### Great features

9751EN-43 comes with a prox keypad as standard for easy setting and unsetting

## Product Compatibility

Model	Description
09751EN-41	Panel complete with 09941EN LCD non prox keypad
09751EN-43	Panel complete with 09943EN LCD prox keypad
PD6662:2004 Compliance	Grade 2, Environmental class 2
Zones	8 fully programmable, expandable to 24
Panel	09751EN-41 blank end station control panel and 09941EN LCD keypad without prox or 09751EN-43 blank end station control panel and 09443EN LCD keypad with prox
Keypads	Accepts up to 4 x 09941EN or 09943EN remote keypads (in any combination)
Proximity reader	The 09943EN keypad contains a proximity reader as standard
Display	LCD display, full feature plain text, 2 lines, 16 character per line
Level setting	A = full set, B, C and D offer part set options
Event Log	700 event log with date and time stamped, viewed locally via keypad or downloaded to a PC
Expansion	Via a choice of 8 zone wired expanders or 8 or 16 zone 868MHz radio expanders
Keyswitch	Keyswitch zone type
Codes	50 x 4 or 6 digit user and/or proximity tags, 1 engineer code
Internal sounder	Accepts up to 2 x 16 ohm internal sounders, exit/entry tones via internal sounder with electronic volume control
Output types	3 open collector, programmable outputs
Secondary communications outputs	Any wire-in secondary communication device via 8 fully programmable outputs
Remote communications	Multi-format alarm reporting via built in communicator, 8 channel fast format, SIA I, II or III or Contact ID
Modem	Built in CCITT V21 - 300 BAUD half duplex
Downloader	Remote downloader facilities for programming, diagnostics and remote control using Cooper Security multi-product downloader software, Windows-based, secure callback (with dynamic third callback number), answerphone defeat option and unattended mode, manual call out
Power supply	Conforms to EN50131-6 Type A power supply, rated power output 580mA
Battery	Accepts a 12v standby battery up to 7Ah rechargeable lead acid, gel type
Dimensions	Control Panel: 240 x 240 x 90mm, Keypad: 115 x 115 x 25mm, Radio expander: 185 x 130 x 30mm
Weight	Control Panel: 3.3kg, Keypad: 0.2kg
Temperature range	Environmental class 2 -10°C to 55°C @ 75% RH


## Keypad Compatibility

Model	Description
09941EN	LCD keypad without prox interface or tag
09443EN	LCD keypad with built-in prox
PROXTAGPK5	Prox tags (pack of 5)

## Expander Compatibility

Model	Description
09954EN-00	8-zone hardwired expander for use with all 9x5x control panels
RFX08	8-zone radio expander, 868MHz narrow band. PD6662:2004 Grade 2
RFX16	16-zone radio expander, 868MHz narrow band. PD6662:2004 Grade 2

Installer Details :

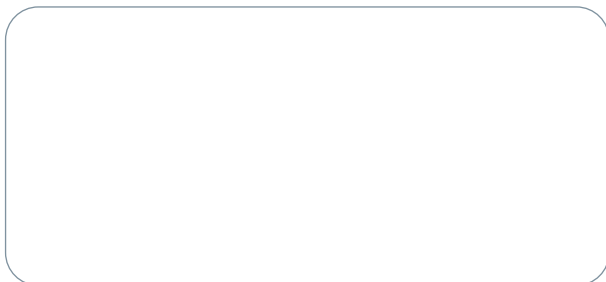

For information on your local stockist  
contact our Marketing Department

telephone: +44 (0)1594 541 979  
fax: +44 (0)1594 545 445  
email: [marketing@coopersecurity.co.uk](mailto:marketing@coopersecurity.co.uk)

SCAN-001-0210

[www.coopersecurity.co.uk](http://www.coopersecurity.co.uk)

**COOPER** Safety

All Cooper logos are valuable trademarks of Cooper Industries in the U.S and other countries. You are not permitted to use Cooper trademarks without the prior consent of Cooper Industries.