



Thinking about performance : Quality products designed to perform

Scantronic 9752EN-43

PD6662: 2004 GRADE 2

Hybrid Range - 868MHz Narrowband Radio



COOPER Safety

Fully compliant with:

- EN50131 Grade 2
- PD6662:2004 Grade 2
- DD243: 2004

8 onboard zone control panel complete with 09943EN LCD keypad, expandable to 32 zones

3 fully programmable outputs (2 relays and 1 transistorised)

Choice of hardwired or wire-free 868MHz narrowband radio expansion

RS232 serial port: full remote and local UDL, remote control, remote servicing and system diagnostics via PC-based Windows™ download programme


Accepts up to four 09941EN (non prox) or 09944EN (prox) LCD keypads

Full (A) and 3 part-set options (B, C and D)

8 fully programmable secondary communications outputs

700-event log with date and time stamped

Alarm reports can be Fast Format, Contact ID or SIA 1, 2 or 3

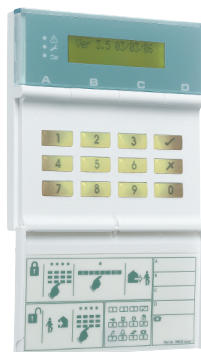

Product Compatibility

Model	Description
PD6662:2004 Compliance	Grade 2, Environmental class 2, for both wired and radio expansion. ATS2 communications
Zones	8 fully programmable, expandable to 32 wired or wireless
Panel	09752EN-43 blank end-station control panel and 09943 LCD keypad as a kit
Keypads	Accepts up to 4 x 09943EN or 09941EN keypads
Proximity reader	09943EN keypad includes a proximity reader as standard
Display	Full feature plain text LCD display, 2 x lines, 16 characters per line
Level Setting	A = full set, B, C and D offer part set options
Partitions	A,B,C & D buttons offer 4 x fully independent partitions each with individual entry/exit timers
Event Log	700 event log with date and time stamped, viewed or downloaded
Expansion	Via a choice of 8-zone wired expanders or 8 or 16-zone 868MHz radio expanders
Keyswitch	Keyswitch zone type, full = A, part = B setting/unsetting, disarm and reset
Codes	50 x 4 or 6 digit user and/or 49 proximity tags, 1 engineer code
Internal sounder	Accepts up to 2 x 16 ohm internal sounders, exit/entry tones via internal sounder with electronic volume control
Output Types	Outputs 1 and 2 are relays and output 3 is open collector. All outputs are programmable
Remote Communications	Multi-format alarm reporting via a built-in communicator, 8 channel fast format, SIA I, II, III or contact ID
-21CN Compatible	
Modem	Built-in CCITT V21 - 300 baud half duplex
Local Programming	Built-in RS232 serial port for local connection to a laptop PC for programming and diagnostics
Downloader	Remote downloader facilities for programming, diagnostics and remote control using Cooper Security Multi-Product downloader software, Windows based, Secure Callback (with dynamic third call-back number), answerphone defeat option and unattended mode, Manual call out
Power Supply	Conforms to EN50131-6 Type A power supply, rated power output 580mA
Battery	Standby battery 12 volt, 7Ah rechargeable lead acid, gel type
Dimensions (W x H x D)	Control panel: 384 x 312 x 95mm, 09941EN/09943EN Keypad: 115 x 156 x 25mm,
Weight	Control panel = 5.0Kg 09941/09943EN keypad = 205gm
Secondary Communication Outputs	Any wire-in secondary communication device via 8 fully programmable outputs


Product Compatibility

Model	Description
09954EN-00	8-zone hard-wired expander for use with all 9x5x control panels
RFX08	8-zone radio expander, 868MHz. PD6662: 2004 Grade 2
RFX16	16-zone radio expander, 868MHz. PD6662: 2004 Grade 2

Keypad Compatibility

Model	Description
09941EN	LCD keypad (no prox facility)
09943EN	LCD keypad with built-in prox

Installer Details :

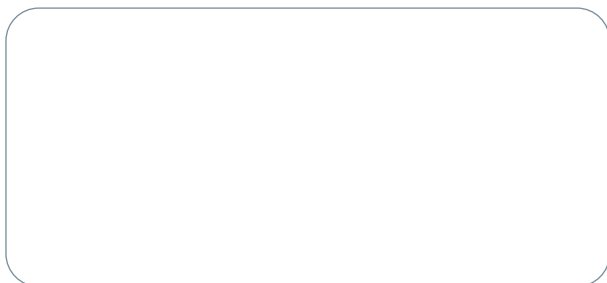

**For information on your local stockist
contact our Marketing Department**

telephone: +44 (0)1594 541 979
 fax: +44 (0)1594 545 445
 email: marketing@coopersecurity.co.uk

www.coopersecurity.co.uk

COOPER Safety